



DISC BRAKES wilwood

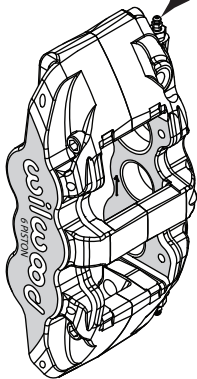

- Use only the uppermost bleed screw(s) to bleed air from the caliper.

- **DO NOT** use the lower bleed screw(s). Doing so may introduce air into the system.

- If calipers are mounted horizontally they must be dismantled and rotated so the bleed screw(s) is above the bores.

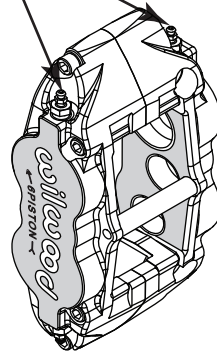

www.wilwood.com • E-mail Additional Assistance: info@wilwood.com