

HI-TEMP 570 RACING BRAKE FLUID DOT 3

FEATURES:

- Wilwood's 570 is a DOT 3 rated brake fluid
- Lower viscosity makes bleeding easier
- Resists aeration and foaming
- Dry boiling point 570° F




Wilwood Hi-Temp 570 racing brake fluid has been widely used in the extreme environment of auto racing for decades, and the improved DOT 3 rated formula is even better. It has been proven to work, lap after lap, with no loss of braking or increased pedal travel despite severe heat.

A high boiling point is only the beginning. The low viscosity of the DOT 3 rated formula lets the modern car's ABS, electronic stability control systems, and brake-based limited-slip systems react faster. It also makes bleeding the brakes quicker and easier.

Hi-Temp 570 also improves resistance to aeration and foaming, which lead to bubble formation. No bubbles means improved pedal feel in severe use.

Available in convenient 12-ounce, hermetically sealed bottles to prevent moisture absorption. Open containers should be used right away or stored only for short periods of time with a secure cap and an air-tight zip-top or heat-sealed vacuum bag.

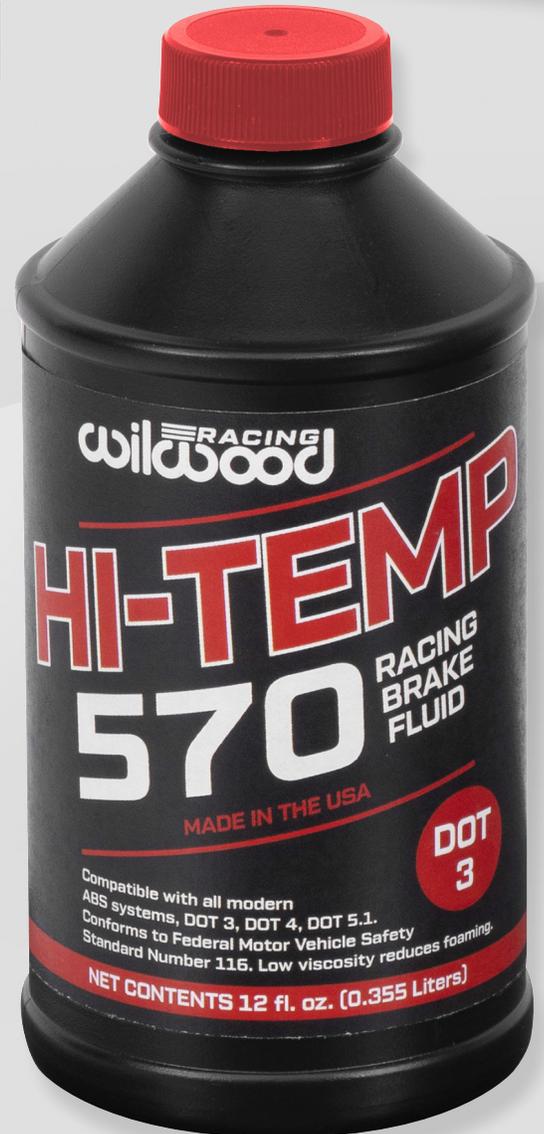

Note: Compatible with all modern ABS Systems, calling for DOT 3, DOT 4, and DOT 5.1. It is not advisable to mix different DOT ratings. Conforms to Federal Motor Vehicle Safety Standard Number 116. Low viscosity reduces foaming.

DO NOT USE WHERE SILICONE DOT 5 FLUID IS SPECIFIED.

ORDERING INFORMATION: PH: 805.388.1188 • FAX: 805.388.4938 • wilwood.com • info@wilwood.com

PART NUMBER	DESCRIPTION
290-0632	Hi-Temp 570 Bottle, 12 fluid ounces (1 Bottle)
290-2210	Hi-Temp 570 Six Pack, 12 fluid ounces (6 Pack Bottles)
290-0633	Hi-Temp 570 Case, 12 fluid ounces (24 Pack Bottles)