



TACTICAL XTREME TX6R FORGED RADIAL MOUNT CALIPER




The Tactical Xtreme TX6R

radial mount six-piston calipers are engineered and purpose built for severe duty service on heavy duty Trucks, SUV's, and Class 1, 2, and 3 Armored Vehicles up to 14,000 lbs. GVWR. The combination of the forged aluminum body, stainless steel pistons, large pad volume, and the ability to accommodate brake rotors up to 1.50" thick, make the TX6R the ultimate choice for high strength, lightweight, and tactical level braking capacity for all types of highway and off-road extreme duty service applications.

Caliper Features



- Versatile and easily adapted radial mount design
- Stress flow forged aluminum 6-piston body design
- Stainless steel pistons with high-temp internal bore seals
- Hard anodized finish on base models with options for gloss black or red powder coat
- Developed for rotors from 14.25" to 16.00" diameter
- Rotor widths from 1.38" to 1.50"
- Stainless steel bridge plates
- Protected single bleed design with internal fluid ports
- Easy access top loaded type 10120, .770" thick pads with rigid .240" thick backing plate

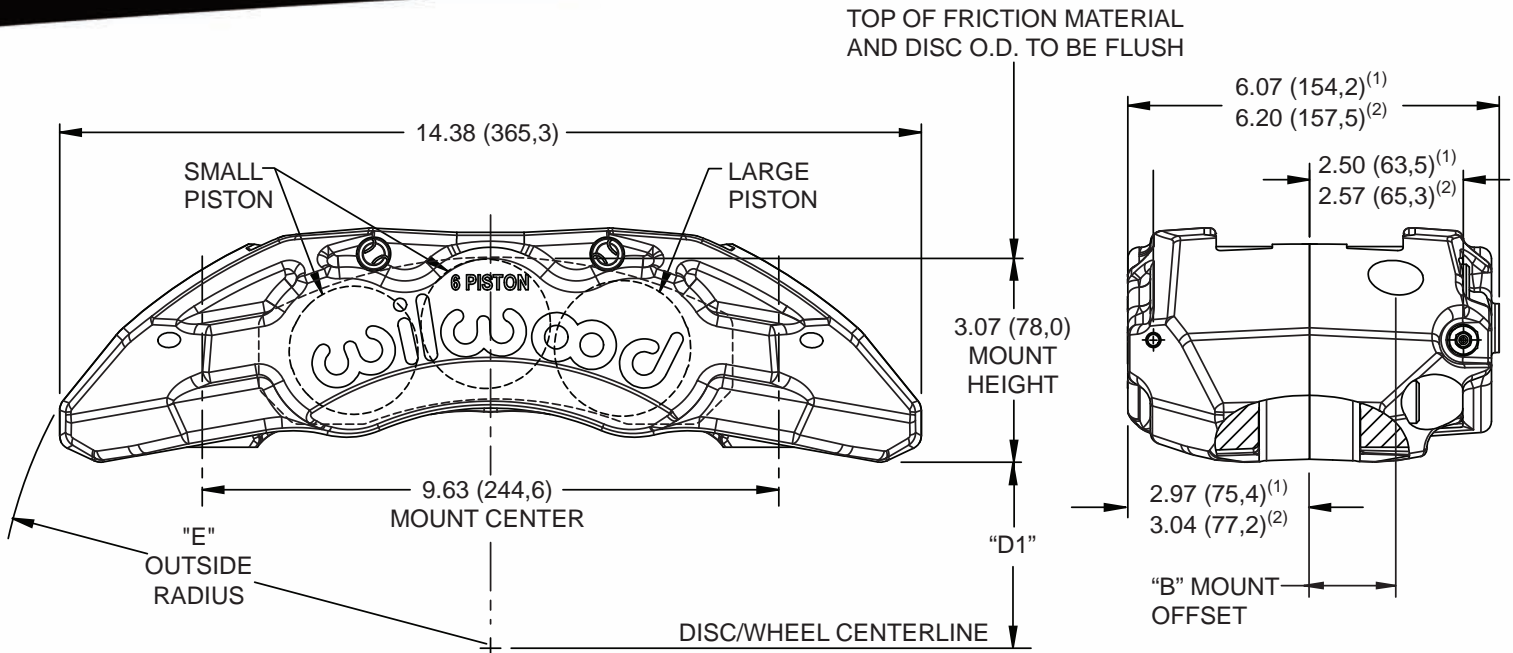

DIMENSION "D1" = (DISC DIAMETER/2) - 3.07 (78,0)



NOTE: RIGHT HAND CALIPER SHOWN
INLET FITTING: 1/8-27 NPT

- (1) DIMENSION FOR 1.38 (35,1) THICK ROTOR
- (2) DIMENSION FOR 1.50 (38,1) THICK ROTOR

	DISC WIDTH	"B" MOUNT OFFSET
(1)	1.38 (35,1)	1.38 (35,1)
(2)	1.50 (38,1)	1.44 (36,6)

DISC DIAMETER	"E" OUTSIDE RADIUS
14.25 (362,0)	8.61 (218,7)
15.00 (381,0)	8.87 (225,3)
16.00 (406,4)	9.55 (242,6)

TX6R Caliper, Dimensional Characteristics

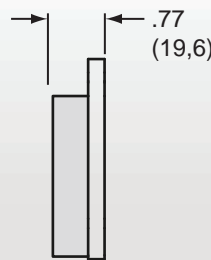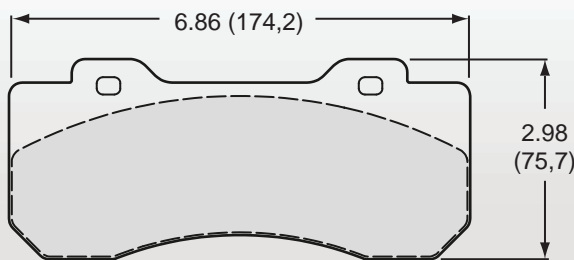

AXLE SET P/N	PAD TYPE / COMPOUND
150 - 13773K	10120 -20 BP-20 Smart Pad

TX6R Caliper, Type 10120 Brake Pad Dimensions and Ordering Information

ORDERING INFORMATION:

CALIPER	PISTON SIZES	ROTOR WIDTH	ORIENTATION	BLACK POWDER PART NUMBER	RED POWDER PART NUMBER	HARD ANODIZED PART NUMBER
TX6R	2.00/1.88/1.88"	1.38"	Right Hand	120-13815-BK	120-13815-RD	120-13815
TX6R	2.00/1.88/1.88"	1.38"	Left Hand	120-13816-BK	120-13816-RD	120-13816
TX6R	2.00/1.88/1.88"	1.50"	Right Hand	120-13813-BK	120-13813-RD	120-13813
TX6R	2.00/1.88/1.88"	1.50"	Left Hand	120-13814-BK	120-13814-RD	120-13814
TX6R	1.75/1.62/1.62"	1.38"	Right Hand	120-13817-BK	120-13817-RD	120-13817
TX6R	1.75/1.62/1.62"	1.38"	Left Hand	120-13818-BK	120-13818-RD	120-13818